

■ MODULAR ENCLOSURES FOR DOMESTIC SWITCHES AND SOCKET OUTLETS



■ REFERENCE STANDARDS

EN 60670-1




■ MARKINGS AND DIRECTIVES



■ QUALITY MARKS



■ VERSIONS

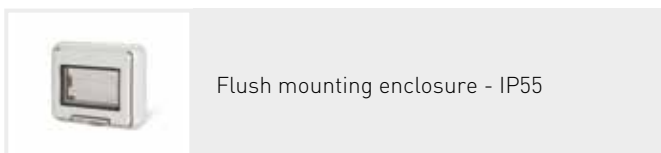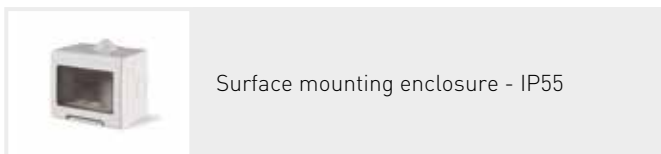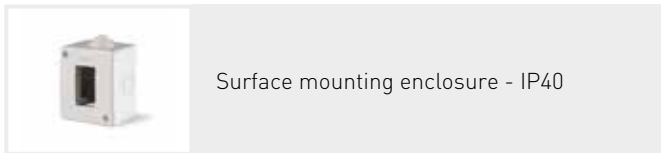

Enclosures accept EVOLUTION Series modules.

■ TECHNICAL CHARACTERISTICS

Protection degree:	IP40-IP55
Installation temperature:	-5°C +60°C
Self extinguishing degree (GWT):	650°C
Impact resistance (IK degree):	IK06
Material:	Thermoplastic (Halogen Free)
Colour:	Grey RAL 7035 Anthracite RAL 7021 (flush mounting version)

■ BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant	Resistant

Resistance values to chemical agents have to be considered indicative. For further information and specific substances, contact the technical service.

